


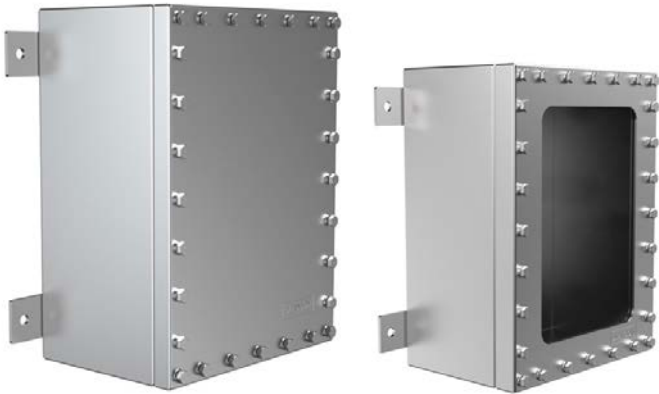

INDUSTRY STANDARDS

NEMA Type 6, 6P
IP67/68 IEC 60529
IK10 Impact Resistant

APPLICATION

The STANDARD SUBMERSIBLE Enclosure is the industry standard for power & utility, infrastructure and renewal energy companies requiring ultimate protection against extreme environmental conditions. Manufactured from corrosion resistant Stainless Steel Type 316 and a single piece Neoprene Gasket to provide watertight protection of vital electrical equipment. SLAYSON's Standard SUBMERSIBLE range of enclosures and accessories delivers a reliable enclosuresystem to meet all industry environmental challenges.

MODIFICATION AND CUSTOMIZATION

SLAYSON® excels at modifying and customizing all our products to meet your exact specifications. Whether you require , connector through hole cutouts, welded in-place accessories, or a non- standard size. Contact our experienced Engineers about your project specific solution.

SPECIFICATIONS

- NEMA 6P and IP68
- Submersible up to 15 ft / 5 mtr (IEC 60529)
- Corrosion Resistant Salt Spray Test (ASTM B117)
- Stainless Steel Type 316 Fasteners & Hardware
- Trough Collar Sealing Flange
- Seams continuously welded and ground smooth
- Single piece Neoprene Gasket
- Internal Threaded Collar Studs locations for Internal Mount Plate [B]
- High Impact & Crush Resistance (IK10)

MATERIAL

Stainless Steel Type 316 14 gauge | 2.00mm*

CODE

S

FINISH

#4 Surface Finish*

M

*Alternative finish & material options available on request

ACCESSORIES



Internal Mount Plate	B
Hinged Lid / Door	H
Optical Window Lid / Door	O
Security Lock Tab	P
Nameplate	N
Captive Lid Fasteners	C
Internal Swing Out Panel	S
Shock & Vibration Mount Kit	V
360° EMC / EMP Shielding Gasket	E
External Grounding Stud	G
Lifting Eye Hooks	L
Raised Floor Mounting Plinths	R
Heavy Duty Gusset mount tabs	T
Lid / Door Stay	D
Access Door (IP66)	A
Pull Handle	U
Document Pocket	M
Welded In-Place Hubs	*
Welded In-Place Studs	*
Cable Glands / Cord grips	*
NPT Cable Glands	*

*Customer Modification Code is required when the Accessory component selected requires any of the following: enclosure cutouts, through holes or penetrations, customer involved design for accessory placement. This code is added in front of the part number by SLAYSON® to provide a unique identifier for customer specific engineering data.

PART NUMBER BUILDER

Customer Mod Code*			Material	Imperial	A Height (cm)	B Width (cm)	C Depth (cm)	Accessory Codes		
		—	A	S	M					
			Enclosure Series	Finish						

For Non-Standard sizes or to add Optional Accessories use the Part Number Builder to configure the part number.

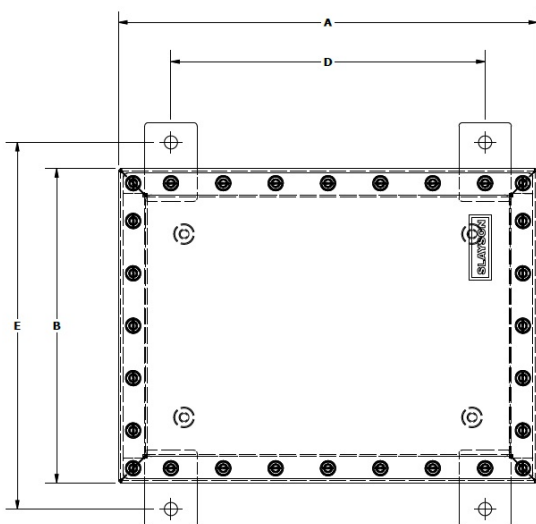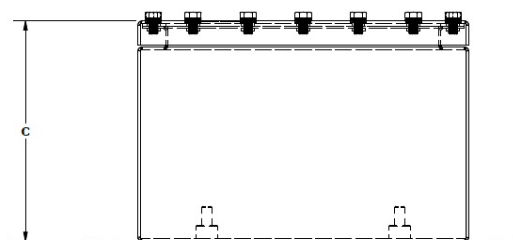

	A		B		C		D		E		INTERNAL MOUNT PLATE				
PART NUMBER	Height		Width		Depth		Mount Height		Mount Width		Height		Width		Gauge mm
	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	
ASM909050	90	900.0	90	900.0	50	500.0	80	800.0	95	950.0	80	800.0	80	800.0	2.00
ASM909040	90	900.0	90	900.0	40	400.0	80	800.0	95	950.0	80	800.0	80	800.0	2.00
ASM909030	90	900.0	90	900.0	30	300.0	80	800.0	95	950.0	80	800.0	80	800.0	2.00
ASM907550	90	900.0	75	750.0	50	500.0	80	800.0	80	800.0	80	800.0	65	650.0	2.00
ASM907550	90	900.0	75	750.0	40	400.0	80	800.0	80	800.0	80	800.0	65	650.0	2.00
ASM907530	90	900.0	75	750.0	30	300.0	80	800.0	80	800.0	80	800.0	65	650.0	2.00
ASM906050	90	900.0	60	600.0	50	500.0	80	800.0	65	650.0	80	800.0	50	500.0	2.00
ASM906040	90	900.0	60	600.0	40	400.0	80	800.0	65	650.0	80	800.0	50	500.0	2.00
ASM906030	90	900.0	60	600.0	30	300.0	80	800.0	65	650.0	80	800.0	50	500.0	2.00
ASM858540	85	850.0	85	850.0	40	400.0	75	750.0	90	900.0	75	750.0	75	750.0	2.00
ASM858530	85	850.0	85	850.0	30	300.0	75	750.0	90	900.0	75	750.0	75	750.0	2.00
ASM858525	85	850.0	85	850.0	25	250.0	75	750.0	90	900.0	75	750.0	75	750.0	2.00
ASM857040	85	850.0	70	700.0	40	400.0	75	750.0	75	750.0	75	750.0	60	600.0	2.00
ASM857030	85	850.0	70	700.0	30	300.0	75	750.0	75	750.0	75	750.0	60	600.0	2.00
ASM857025	85	850.0	70	700.0	25	250.0	75	750.0	75	750.0	75	750.0	60	600.0	2.00
ASM856040	85	850.0	60	600.0	40	400.0	75	750.0	65	650.0	75	750.0	50	500.0	2.00
ASM856030	85	850.0	60	600.0	30	300.0	75	750.0	65	650.0	75	750.0	50	500.0	2.00
ASM856025	85	850.0	60	600.0	25	250.0	75	750.0	65	650.0	75	750.0	50	500.0	2.00
ASM757540	75	750.0	75	750.0	40	400.0	65	650.0	80	800.0	65	650.0	65	650.0	2.00
ASM757530	75	750.0	75	750.0	30	300.0	65	650.0	80	800.0	65	650.0	65	650.0	2.00
ASM757525	75	750.0	75	750.0	25	250.0	65	650.0	80	800.0	65	650.0	65	650.0	2.00
ASM756040	75	750.0	60	600.0	40	400.0	65	650.0	65	650.0	65	650.0	50	500.0	2.00
ASM756030	75	750.0	60	600.0	30	300.0	65	650.0	65	650.0	65	650.0	50	500.0	2.00
ASM756025	75	750.0	60	600.0	25	250.0	65	650.0	65	650.0	65	650.0	50	500.0	2.00
ASM755040	75	750.0	50	500.0	40	400.0	65	650.0	55	550.0	65	650.0	40	400.0	2.00
ASM755030	75	750.0	50	500.0	30	300.0	65	650.0	55	550.0	65	650.0	40	400.0	2.00
ASM755025	75	750.0	50	500.0	25	250.0	65	650.0	55	550.0	65	650.0	40	400.0	2.00
ASM707040	70	700.0	70	700.0	40	400.0	60	600.0	75	750.0	60	600.0	60	600.0	2.00
ASM707030	70	700.0	70	700.0	30	300.0	60	600.0	75	750.0	60	600.0	60	600.0	2.00
ASM707025	70	700.0	70	700.0	25	250.0	60	600.0	75	750.0	60	600.0	60	600.0	2.00
ASM705540	70	700.0	55	550.0	40	400.0	60	600.0	60	600.0	60	600.0	45	450.0	2.00
ASM705530	70	700.0	55	550.0	30	300.0	60	600.0	60	600.0	60	600.0	45	450.0	2.00
ASM705525	70	700.0	55	550.0	25	250.0	60	600.0	60	600.0	60	600.0	45	450.0	2.00
ASM704530	70	700.0	45	450.0	30	300.0	60	600.0	50	500.0	60	600.0	35	350.0	2.00
ASM704525	70	700.0	45	450.0	25	250.0	60	600.0	50	500.0	60	600.0	35	350.0	2.00
ASM704520	70	700.0	45	450.0	20	200.0	60	600.0	50	500.0	60	600.0	35	350.0	2.00
ASM656530	65	650.0	65	650.0	30	300.0	55	550.0	70	700.0	55	550.0	55	550.0	2.00
ASM656525	65	650.0	65	650.0	25	250.0	55	550.0	70	700.0	55	550.0	55	550.0	2.00
ASM656520	65	650.0	65	650.0	20	200.0	55	550.0	70	700.0	55	550.0	55	550.0	2.00
ASM655030	65	650.0	50	500.0	30	300.0	55	550.0	55	550.0	55	550.0	40	400.0	2.00
ASM655025	65	650.0	50	500.0	25	250.0	55	550.0	55	550.0	55	550.0	40	400.0	2.00
ASM655020	65	650.0	50	500.0	20	200.0	55	550.0	55	550.0	55	550.0	40	400.0	2.00
ASM654030	65	650.0	40	400.0	30	300.0	55	550.0	45	450.0	55	550.0	30	300.0	2.00
ASM654025	65	650.0	40	400.0	25	250.0	55	550.0	45	450.0	55	550.0	30	300.0	2.00
ASM654020	65	650.0	40	400.0	20	200.0	55	550.0	45	450.0	55	550.0	30	300.0	2.00
ASM606030	60	600.0	60	600.0	30	300.0	50	500.0	65	650.0	50	500.0	50	500.0	2.00
ASM606025	60	600.0	60	600.0	25	250.0	50	500.0	65	650.0	50	500.0	50	500.0	2.00
ASM606020	60	600.0	60	600.0	20	200.0	50	500.0	65	650.0	50	500.0	50	500.0	2.00
ASM604530	60	600.0	45	450.0	30	300.0	50	500.0	50	500.0	50	500.0	35	350.0	2.00
ASM604525	60	600.0	45	450.0	25	250.0	50	500.0	50	500.0	50	500.0	35	350.0	2.00
ASM604520	60	600.0	45	450.0	20	200.0	50	500.0	50	500.0	50	500.0	35	350.0	2.00
ASM603530	60	600.0	35	350.0	30	300.0	50	500.0	40	400.0	50	500.0	25	250.0	2.00
ASM603525	60	600.0	35	350.0	25	250.0	50	500.0	40	400.0	50	500.0	25	250.0	2.00
ASM603520	60	600.0	35	350.0	20	200.0	50	500.0	40	400.0	50	500.0	25	250.0	2.00