



**SPECIFICATIONS**

- Prolonged Submersible up to 15 ft / 5 mtr (IEC 60529)
- Corrosion Resistant Salt Spray Test (ASTM B117)
- Seams continuously welded and ground smooth
- Raised Floor Mounting Plinth
- Trough Collar Sealing Flange
- Single piece Neoprene Gasket
- Stainless Steel 316 Fasteners & Hardware
- Heavy-duty lifting eye hooks
- Internal T Weld Nut fastening locations for optional Back Plate accessory
- High Impact & Crush Resistance (IK10)
- Heavy-gauge removable door hinges

**MATERIAL**

14 gauge | 2.00mm Stainless Steel Type 316\*

**FINISH**

#4 Brush Surface Finish\*

\*Alternative finish & material options available on request

**OPTIONAL ACCESSORIES**

- Internal Mount/Back Plates
- Optical Door Window
- Padlock Tab
- Captive Lid Fasteners
- Internal Swing out Panel
- Ground Stud
- Welded in place Threaded Bosses
- Stainless Steel Type 316 Cable Glands / Cord grips
- Seismic Shock & Vibration Isolation Mount Kit
- Dual Gasket Beryllium Copper for 360° EMC / RFI Shielding
- External Grounding Stud
- Heavy Duty wall mount tabs


**CODE**

- B
- O
- L
- C
- S

**PART NUMBER BUILDER**

Customer Mod Code*	Material	Imperial	A Height (cm)	B Width (cm)	C Depth (cm)	Accessory Codes
-	C S	M I	3 6	3 6	2 2	
	Enclosure Series	Submersion Depth	For Non-Standard sizes or to add Optional Accessories use the Part Number Builder to configure the part number.			

\*Generated by SLAYSON Engineering for customer specific modifications

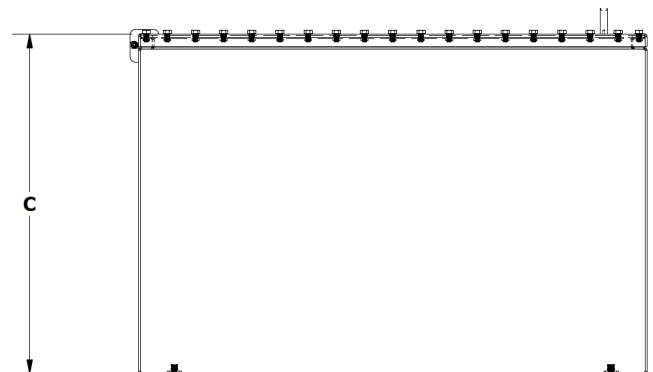

**INDUSTRY STANDARDS**


NEMA Type 6, 6P  
IP67/68 IEC 60529  
IK10 Impact Resistant

**APPLICATION**

The FREESTAND SUBMERSIBLE ENCLOSURE is the industry standard for power utility, infrastructure and renewal energy companies requiring ultimate protection against extreme environmental conditions. Manufactured from corrosion resistant Stainless Steel Type 316 and a single piece Neoprene Gasket to provide watertight protection of your vital electrical equipment. SLAYSON's FREESTAND SUBMERSIBLE ENCLOSURE range of cabinet panel enclosures and accessories can be wall or floor mounted to deliver a reliable enclosures system to meet all of industries environmental challenges.

**MODIFICATION AND CUSTOMIZATION**

SLAYSON excels at modifying and personalizing all our Enclosure products to meet your exact specifications. Whether you require cutouts, welded in-place bosses or a non-standard size. Contact our experienced Engineers about your project specific solution.

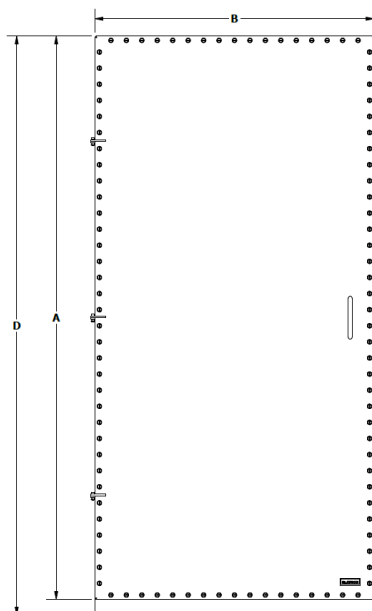

PART NUMBER	A		A		C		Gauge
	Height		Width		Depth		
	in	mm	in	mm	in	mm	
CSMI722442	72	1828	24	609	42	1066	14
CSMI722436	72	1828	24	609	36	914	14
CSMI722430	72	1828	24	609	30	457.2	14
CSMI722424	72	1828	24	609	24	609	14
CSMI602442	60	1524	24	609	42	1066	14
CSMI602436	60	1524	24	609	36	914	14
CSMI602430	60	1524	24	609	30	762	14
CSMI602424	60	1524	24	609	24	609	14
CSMI542442	54	1371	24	609	42	1066	14
CSMI542424	54	1371	24	609	24	609	14
CSMI482442	48	1219	24	609	42	1066	14
CSMI482424	48	1219	24	609	24	609	14
CSMI422442	42	1066	24	609	42	1066	14
CSMI422424	42	1066	24	609	24	609	14
CSMI362424	36	914	24	609	24	609	14