

SPECIFICATIONS

- Prolonged Submersible up to 15 ft / 5 mtr (IEC 60529)
- Corrosion Resistant Salt Spray Test (ASTM B117)
- Rugged Design & Construction
- Seams continuously welded and ground smooth
- Single piece Neoprene Gasket
- Dual Gasket Beryllium Copper
- 360° Shielding EMC / RFI (MIL-STD-285)
- Interlock Corner Mounting locations
- Internal Weld Nut fastening locations for optional Back Plate accessory
- High Impact & Crush Resistance (IK10)
- Designed to withstand Shock & Vibration (MIL-STD-810)

MATERIAL

14 gauge | 2.00mm Stainless Steel Type 316*

FINISH

Stainless Steel #4 Surface Finish*

*Alternative finish & material options available on request

INDUSTRY STANDARDS

NEMA Type 6, 6P
 IP67/68 IEC 60529
 IK10 Impact Resistant
 MIL-STD- 810, MIL-STD-285

APPLICATION

The NAV-6P MARINE SUBMERSIBLE ENCLOSURE offers reliable protection for shipboard systems, Naval vessels and marine electronic hardware deployed in the harshest environments. Manufactured from Type 316 Stainless Steel this Enclosure series has hermetic sealing preventing any ingress of dust and water, with dual Beryllium Copper gasket to insure complete 360° EMC/RFI immunity. The NAV-6P offers a COTS range of corrosion resistant enclosures and accessories ,delivering a proven and flexible enclosure system to Naval specification.

MODIFICATION AND CUSTOMIZATION

SLAYSON excels at modifying and personalizing all our Enclosure products to meet your exact specifications. Whether you require connector cutouts, marker engraving or a non-standard size. Contact our experienced Engineers about your project specific solution.


OPTIONAL ACCESSORIES

- Internal Mount/Back Plates
- Hinged Lid
- Optical Window
- Padlock Tab
- Captive Lid Fasteners
- Internal Swing out Panel
- Welded in place Threaded Bosses
- Stainless Steel Type 316 Cable Glands / Cord grips
- Shock & Vibration Isolation Mounts



CODE

- B
- H
- O
- L
- C
- S

PART NUMBER BUILDER

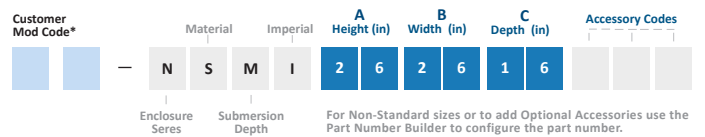

*Generated by SLAYSON Engineering for customer specific modifications

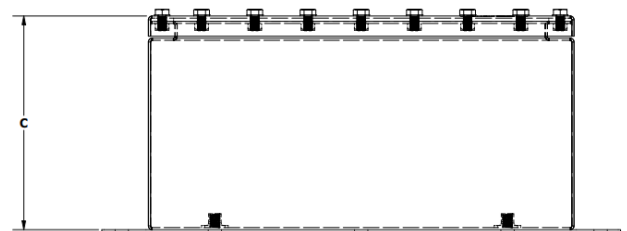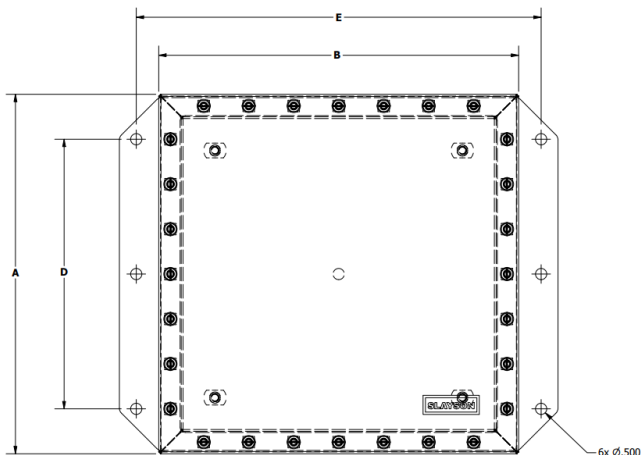

PART NUMBER	A		B		C		D		E		INTERNAL MOUNT PLATE				Gauge
	Height		Width		Depth		Mount Height		Mount Width		Height		Width		
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	
NSMI262616	26	660.4	26	660.4	16	406.4	22	558.8	28	711.2	24	609.6	24	609.6	14
NSMI262614	26	660.4	26	660.4	14	355.6	22	558.8	28	711.2	24	609.6	24	609.6	14
NSMI262214	26	660.4	22	558.8	14	355.6	22	558.8	24	609.6	24	609.6	20	508.0	14
NSMI262012	26	660.4	20	508.0	12	304.8	22	558.8	22	558.8	24	609.6	18	457.2	14
NSMI261410	26	660.4	14	355.6	10	254.0	22	558.8	16	406.4	24	609.6	12	304.8	14
NSMI242416	24	609.6	24	609.6	16	406.4	20	508.0	26	660.4	22	558.8	22	558.8	14
NSMI242414	24	609.6	24	609.6	14	355.6	20	508.0	26	660.4	22	558.8	22	558.8	14
NSMI242014	24	609.6	20	508.0	14	355.6	20	508.0	22	558.8	22	558.8	18	457.2	14
NSMI241812	24	609.6	18	457.2	12	304.8	20	508.0	20	508.0	22	558.8	16	406.4	14
NSMI241210	24	609.6	12	304.8	10	254.0	20	508.0	14	355.6	22	558.8	10	254.0	14
NSMI222214	22	558.8	22	558.8	14	355.6	18	457.2	24	609.6	20	508.0	20	508.0	14
NSMI222212	22	558.8	22	558.8	12	304.8	18	457.2	24	609.6	20	508.0	20	508.0	14
NSMI221812	22	558.8	18	457.2	12	304.8	18	457.2	20	508.0	20	508.0	16	406.4	14
NSMI221410	22	558.8	14	355.6	10	254.0	18	457.2	16	406.4	20	508.0	12	304.8	14
NSMI221008	22	558.8	10	254.0	08	203.2	18	457.2	12	304.8	20	508.0	8	203.2	14
NSMI202014	20	508.0	20	508.0	14	355.6	16	406.4	22	558.8	18	457.2	18	457.2	14
NSMI202012	20	508.0	20	508.0	12	304.8	16	406.4	22	558.8	18	457.2	18	457.2	14
NSMI201612	20	508.0	16	406.4	12	304.8	16	406.4	18	457.2	18	457.2	14	355.6	14
NSMI201210	20	508.0	12	304.8	10	254.0	16	406.4	14	355.6	18	457.2	10	254.0	14
NSMI201208	20	508.0	12	304.8	08	203.2	16	406.4	14	355.6	18	457.2	10	254.0	14
NSMI181814	18	457.2	18	457.2	14	355.6	14	355.6	20	508.0	16	406.4	16	406.4	14
NSMI181812	18	457.2	18	457.2	12	304.8	14	355.6	20	508.0	16	406.4	16	406.4	14
NSMI181612	18	457.2	16	406.4	12	304.8	14	355.6	18	457.2	16	406.4	14	355.6	14
NSMI181410	18	457.2	14	355.6	10	254.0	14	355.6	16	406.4	16	406.4	12	304.8	14
NSMI181208	18	457.2	12	304.8	08	203.2	14	355.6	14	355.6	16	406.4	08	203.2	14
NSMI161612	16	406.4	16	406.4	12	304.8	12	304.8	18	457.2	14	355.6	14	355.6	14
NSMI161610	16	406.4	16	406.4	10	254.0	12	304.8	18	457.2	14	355.6	14	355.6	14
NSMI161410	16	406.4	14	355.6	10	254.0	12	304.8	16	406.4	14	355.6	12	304.8	14
NSMI161208	16	406.4	12	304.8	08	203.2	12	304.8	14	355.6	14	355.6	08	203.2	14
NSMI141412	14	355.6	14	355.6	12	304.8	10	254.0	16	406.4	12	304.8	06	152.4	14
NSMI141410	14	355.6	14	355.6	10	254.0	10	254.0	16	406.4	12	304.8	12	304.8	14
NSMI141210	14	355.6	12	304.8	10	254.0	10	254.0	14	355.6	12	304.8	10	254.0	14
NSMI141008	14	355.6	10	254.0	08	203.2	10	254.0	12	304.8	12	304.8	08	203.2	14
NSMI121210	12	304.8	12	304.8	10	254.0	08	203.2	14	355.6	10	254.0	06	152.4	14
NSMI121208	12	304.8	12	304.8	08	203.2	08	203.2	14	355.6	10	254.0	04	101.6	14
NSMI121008	12	304.8	10	254.0	08	203.2	08	203.2	12	304.8	08	203.2	08	203.2	14
NSMI120806	12	304.8	08	203.2	06	152.4	08	203.2	10	254.0	08	203.2	08	203.2	14
NSMI101008	10	254.0	10	254.0	08	203.2	06	152.4	12	304.8	08	203.2	06	152.4	14
NSMI101006	10	254.0	10	254.0	06	152.4	06	152.4	12	304.8	08	203.2	05	127.0	14
NSMI100806	10	254.0	08	203.2	06	152.4	06	152.4	10	254.0	06	152.4	04	101.6	14
NSMI080806	08	203.2	08	203.2	06	152.4	04	101.6	10	254.0	06	152.4	04	101.6	14
NSMI080804	08	203.2	08	203.2	04	101.6	04	101.6	10	254.0	07	177.8	05	127.0	14