



**SPECIFICATIONS**

- Prolonged Submersible up to 30 ft / 10 mtr (IEC 60529)
- Corrosion Resistant Salt Spray Test (ASTM B117)
- Stainless Steel Type 316 Fasteners & Hardware
- Trough Collar Sealing Flange
- Seams continuously welded and ground smooth
- Single piece Neoprene Gasket
- Internal T Weld Nut fastening locations for optional Back Plate accessory
- High Impact & Crush Resistance (IK10)
- Internal Strengthening Rails for flexible Mounting Options

**MATERIAL**

14 gauge | 2.00mm Stainless Steel Type 316\*

**FINISH**

#4 Brush Surface Finish\*



\*Alternative finish & material options available on request

**OPTIONAL ACCESSORIES**

- Internal Mount/Back Plates
- Hinged Lid
- Optical Window Lid
- Padlock Tab
- Captive Lid Fasteners
- Internal Swing out Panel
- Welded in place Threaded Bosses
- Stainless Steel Type 316 Cable Glands / Cord grips
- Seismic Shock & Vibration Isolation Mount Kit
- Dual Gasket Beryllium Copper for 360° EMC / RFI Shielding
- External Grounding Stud
- Heavy Duty Lifting Eye Hooks
- Raised Floor Mounting Plinths

**CODE**

- B
- H
- O
- L
- C
- S

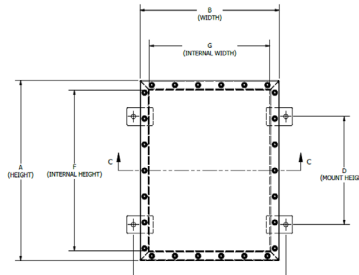

**INDUSTRY STANDARDS**

NEMA Type 6, 6P  
IP67/68 IEC 60529  
IK10 Impact Resistant


**APPLICATION**

The DEEP STANDARD SUBMERSIBLE Enclosure is the deep performer for utility, infrastructure and renewal energy companies. Rugged construction using Strengthening Rails that provide flexible Internal mounting options to give ultimate protection against extreme deep water submersion. Manufactured from corrosion resistant Stainless Steel Type 316 and a single piece Neoprene Gasket to provide watertight protection of your vital electrical equipment. SLAYSON's DEEP STANDARD SUBMERSIBLE range of enclosures and accessories can be wall or floor mounted to deliver a reliable enclosures system to meet all of industries environmental challenges.

**MODIFICATION AND CUSTOMIZATION**

SLAYSON excels at modifying and personalizing all our Enclosure products to meet your exact specifications. Whether you require cutouts, welded in-place bosses or a non-standard size. Contact our experienced Engineers about your project specific solution.

**PART NUMBER BUILDER**

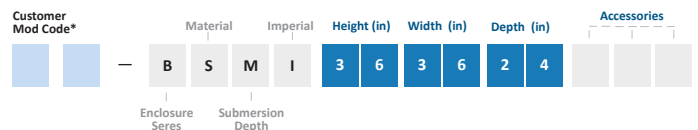

\*Generated by SLAYSON Engineering for customer specific modifications

PART NUMBER	A		B		C		D		E		INTERNAL MOUNT PLATE				Gauge
	Height		Width		Depth		Mount Height		Mount Width		Height		Width		
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	
BSMI363624	36	914.4	36	914.4	24	609.6	32	812.8	38	956.2	32	812.8	32	812.8	14
BSMI363612	36	914.4	36	914.4	12	304.8	32	812.8	38	956.2	32	812.8	32	812.8	14
BSMI343424	34	863.3	34	863.3	24	609.6	30	762.0	36	914.4	30	762.0	30	762.0	14
BSMI343412	34	863.3	34	863.3	12	304.8	30	762.0	36	914.4	30	762.0	30	762.0	14
BSMI303018	30	762.0	30	762.0	18	457.2	26	660.4	32	812.8	26	660.4	26	660.4	14
BSMI302818	30	762.0	28	711.2	18	457.2	26	660.4	28	711.2	26	660.4	26	660.4	14
BSMI282816	28	711.2	28	711.2	16	406.4	24	609.6	30	762.0	24	609.6	24	609.6	14
BSMI282416	28	711.2	24	609.6	16	406.4	24	609.6	26	660.4	24	609.6	24	609.6	14
BSMI262614	26	660.4	26	660.4	14	355.6	22	558.8	28	711.2	22	558.8	22	558.8	14
BSMI262214	26	660.4	26	660.4	14	355.6	22	558.8	24	609.6	22	558.8	22	558.8	14
BSMI242412	24	609.6	24	609.6	12	304.8	20	508.0	26	660.4	20	508.0	20	508.0	14