


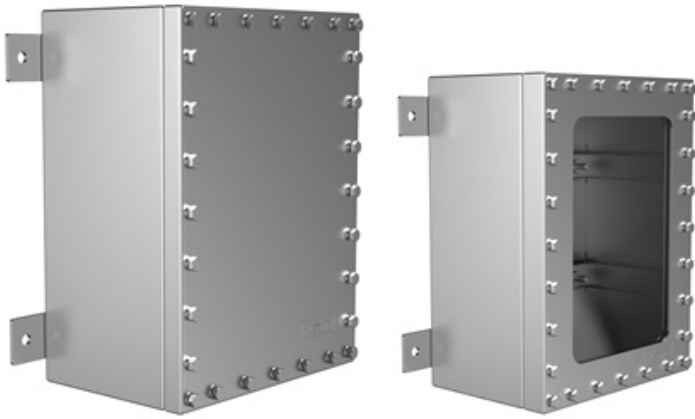

INDUSTRY STANDARDS


NEMA Type 6, 6P
IP67/68 IEC 60529
IK10 Impact Resistant

APPLICATION

The DEEP COMPACT SUBMERSIBLE ENCLOSURE is the deep performer for utility, infrastructure and renewal energy companies. Rugged construction using Strengthening Rails that provide flexible Internal mounting options to give ultimate protection against extreme deep water submersion. Manufactured from corrosion resistant Stainless Steel Type 316 and a single piece Neoprene Gasket to provide watertight protection of your vital electrical equipment. SLAYSON's DEEP COMPACT SUBMERSIBLE range of enclosures and accessories can be wall or floor mounted to deliver a reliable enclosures system to meet all of industries environmental challenges.

MODIFICATION AND CUSTOMIZATION

SLAYSON® excels at modifying and customizing all our products to meet your exact specifications. Whether you require, connector through hole cutouts, welded in-place accessories, or a non- standard size. Contact our experienced Engineers about your project specific solution.

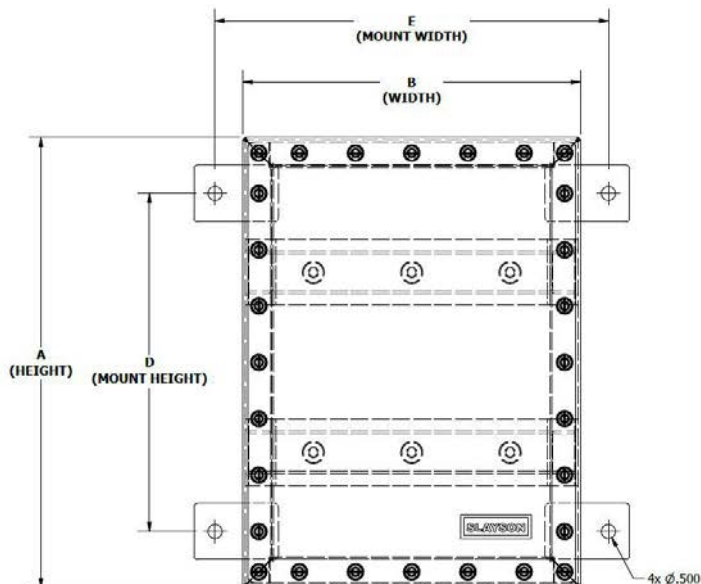

SPECIFICATIONS

- NEMA 6P and IP68
- Submersible up to 30 ft / 10 mtr (IEC 60529)
- Corrosion Resistant Salt Spray Test (ASTM B117)
- Stainless Steel Type 316 Fasteners & Hardware
- Trough Collar Sealing Flange
- Seams continuously welded and ground smooth
- Single piece Neoprene Gasket
- Internal Threaded Collar Stud locations for Internal Mount Plate [B]
- High Impact & Crush Resistance (IK10)
- Internal Strengthening Rails for flexible Mounting Options

MATERIAL

Stainless Steel Type 316 14 gauge | 2.00mm*

CODE

S

FINISH

#4 Surface Finish*

M

*Alternative finish & material options available


ACCESSORIES

Internal Mount Plate	B
Hinged Lid / Door	H
Optical Window Lid / Door	O
Security Lock Tab	P
Nameplate	N
Captive Lid Fasteners	C
Internal Swing Out Panel	S
Shock & Vibration Mount Kit	V
360° EMC / EMP Shielding Gasket	E
External Grounding Stud	G
Lifting Eye Hooks	L
Raised Floor Mounting Plinths	R
Heavy Duty Gusset mount tabs	T
Lid / Door Stay	D
Access Door (IP66)	A
Pull Handle	U
Document Pocket	M
Welded In-Place Hubs	*
Welded In-Place Studs	*
Cable Glands / Cord grips	*
NPT Cable Glands	*

*Customer Modification Code is required when the Accessory component selected requires any of the following: enclosure cutouts, through holes or penetrations, customer involved design for accessory placement. This code is added in front of the part number by SLAYSON® to provide a unique identifier for customer specific engineering data.

PART NUMBER BUILDER

For Non-Standard sizes or to add Optional Accessories use the Part Number Builder to configure the part number.

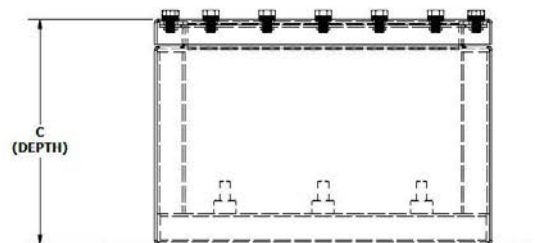

PART NUMBER	A		B		C		D		E		INTERNAL MOUNT PLATE				Gauge	
	Height		Width		Depth		Mount Height		Mount Width		Height		Width			
	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm		
BSM909050	90	900.0	90	900.0	50	500.0	80	800.0	95	950.0	80	800.0	80	800.0	2.00	
BSM909040	90	900.0	90	900.0	40	400.0	80	800.0	95	950.0	80	800.0	80	800.0	2.00	
BSM909030	90	900.0	90	900.0	30	300.0	80	800.0	95	950.0	80	800.0	80	800.0	2.00	
BSM907550	90	900.0	75	750.0	50	500.0	80	800.0	80	800.0	80	800.0	65	650.0	2.00	
BSM907550	90	900.0	75	750.0	40	400.0	80	800.0	80	800.0	80	800.0	65	650.0	2.00	
BSM907530	90	900.0	75	750.0	30	300.0	80	800.0	80	800.0	80	800.0	65	650.0	2.00	
BSM906050	90	900.0	60	600.0	50	500.0	80	800.0	65	650.0	80	800.0	50	500.0	2.00	
BSM906040	90	900.0	60	600.0	40	400.0	80	800.0	65	650.0	80	800.0	50	500.0	2.00	
BSM906030	90	900.0	60	600.0	30	300.0	80	800.0	65	650.0	80	800.0	50	500.0	2.00	
BSM858540	85	850.0	85	850.0	40	400.0	75	750.0	90	900.0	75	750.0	75	750.0	2.00	
BSM858530	85	850.0	85	850.0	30	300.0	75	750.0	90	900.0	75	750.0	75	750.0	2.00	
BSM858525	85	850.0	85	850.0	25	250.0	75	750.0	90	900.0	75	750.0	75	750.0	2.00	
BSM857040	85	850.0	70	700.0	40	400.0	75	750.0	75	750.0	75	750.0	60	600.0	2.00	
BSM857030	85	850.0	70	700.0	30	300.0	75	750.0	75	750.0	75	750.0	60	600.0	2.00	
BSM857025	85	850.0	70	700.0	25	250.0	75	750.0	75	750.0	75	750.0	60	600.0	2.00	
BSM856040	85	850.0	60	600.0	40	400.0	75	750.0	65	650.0	75	750.0	50	500.0	2.00	
BSM856030	85	850.0	60	600.0	30	300.0	75	750.0	65	650.0	75	750.0	50	500.0	2.00	
BSM856025	85	850.0	60	600.0	25	250.0	75	750.0	65	650.0	75	750.0	50	500.0	2.00	
BSM757540	75	750.0	75	750.0	40	400.0	65	650.0	80	800.0	65	650.0	65	650.0	2.00	
BSM757530	75	750.0	75	750.0	30	300.0	65	650.0	80	800.0	65	650.0	65	650.0	2.00	
BSM757525	75	750.0	75	750.0	25	250.0	65	650.0	80	800.0	65	650.0	65	650.0	2.00	
BSM756040	75	750.0	60	600.0	40	400.0	65	650.0	65	650.0	65	650.0	50	500.0	2.00	
BSM756030	75	750.0	60	600.0	30	300.0	65	650.0	65	650.0	65	650.0	50	500.0	2.00	
BSM756025	75	750.0	60	600.0	25	250.0	65	650.0	65	650.0	65	650.0	50	500.0	2.00	
BSM755040	75	750.0	50	500.0	40	400.0	65	650.0	55	550.0	65	650.0	40	400.0	2.00	
BSM755030	75	750.0	50	500.0	30	300.0	65	650.0	55	550.0	65	650.0	40	400.0		