


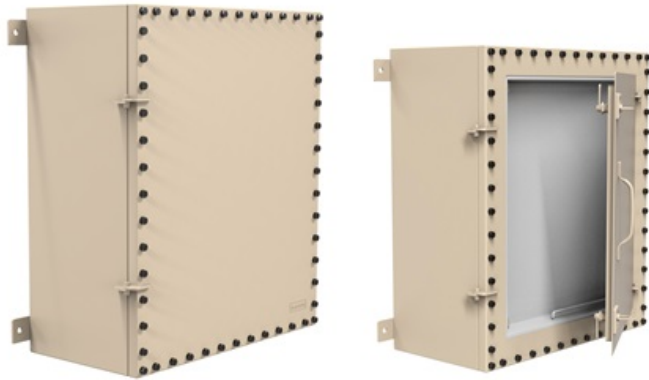

INDUSTRY STANDARDS


NEMA Type 6, 6P
IP67/68 IEC 60529
IK10 Impact Resistant
MIL-STD-810, MIL-STD-285

APPLICATION

The NAV-CONTROL-6P offers ultimate protection for topside shipboard electronics, Naval systems and marine electronic hardware deployed in the harshest environments. Manufactured from corrosion resistant Stainless Steel Type 316 this Panel series has hermetic sealing preventing any ingress of dust and water, with dual Beryllium Copper gasket to insure complete 360° EMC/RFI immunity and operational control access using the Shielded Access Door (IP66) optional accessory. The NAV-CONTROL-6P offers a COTS range of corrosion resistant Shielded Control Panel and Accessories delivering a proven, flexible and rugged panel enclosure system to Naval specification.

MODIFICATION AND CUSTOMIZATION

SLAYSON® excels at modifying and customizing all our products to meet your exact specifications. Whether you require, connector through hole cutouts, welded in-place accessories, or a non-standard size. Contact our experienced Engineers about your project specific solution.

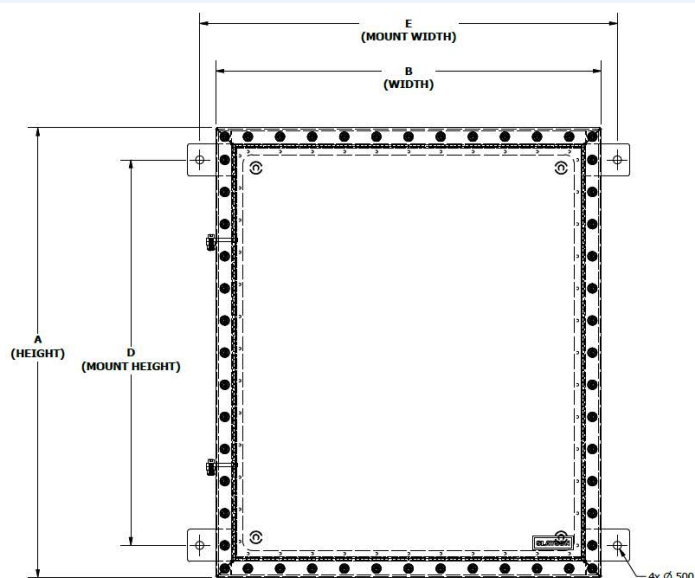

SPECIFICATIONS

- NEMA 6P and IP68
- Submersible up to 15 ft / 5 mtr (IEC 60529)
- Corrosion Resistant Salt Spray Test (ASTM B117)
- Seams continuously welded and ground smooth
- Heavy Duty removable door Hinges
- Single piece Neoprene Gasket
- Dual Gasket Beryllium Copper
- 360° Shielding EMC / EMP (MIL-STD-285)
- Internal Threaded Collar Stud locations for Internal Mount Plate [B]
- High Impact & Crush Resistance (IK10)
- Designed to withstand Shock & Vibration (MIL-STD-810)

MATERIAL

Aluminum 0.080" | 2.00mm*

CODE

A

FINISH

Desert Sand AMS-STD-595 color 33446, RAL 1015*

D

Olive Drab AMS-STD-595 color 24097, RAL6022*

O

Exterior Paint Finish over Chromate Conversion Coating pre-treatment all surfaces
*Alternative finish & material options available

ACCESSORIES

Internal Mount Plate	B
Hinged Lid / Door	H
Optical Window Lid / Door	O
Security Lock Tab	P
Nameplate	N
Captive Lid Fasteners	C
Internal Swing Out Panel	S
Shock & Vibration Mount Kit	V
External Grounding Stud	G
Lifting Eye Hooks	L
Raised Floor Mounting Plinths	R
Heavy Duty Gusset mount tabs	T
Lid / Door Stay	D
Access Door (IP66)	A
Pull Handle	U
Document Pocket	M
Welded In-Place Hubs	*
Welded In-Place Studs	*
Cable Glands / Cord grips	*
NPT Cable Glands	*
Integrated Thermal Heatsink	*
CARC Paint System	*

*Customer Modification Code is required when the Accessory component selected requires any of the following: enclosure cutouts, through holes or penetrations, customer involved design for accessory placement. This code is added in front of the part number by SLAYSON® to provide a unique identifier for customer specific engineering data.

PART NUMBER BUILDER

Customer Mod Code*			Material	Imperial	A Height (cm)	B Width (cm)	C Depth (cm)	Accessory Codes		
		—	E	A	D					
			Enclosure Series		Finish					

For Non-Standard sizes or to add Optional Accessories use the Part Number Builder to configure the part number.

For Non-Standard sizes or to add Optional Accessories use the Part Number Builder to configure the part number.



PART NUMBER	A		B		C		D		E		INTERNAL MOUNT PLATE				Gauge
	Height		Width		Depth		Mount Height		Mount Width		Height		Width		
	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	
EAD909060	90	900.0	90	900.0	60	600.0	80	800.0	95	950.0	80	800.0	80	800.0	0.08"
EAD909030	90	900.0	90	900.0	30	300.0	80	800.0	95	950.0	80	800.0	80	800.0	0.08"
EAD858560	85	850.0	85	850.0	60	600.0	75	750.0	90	900.0	75	750.0	75	750.0	0.08"
EAD858530	85	850.0	85	850.0	30	300.0	75	750.0	90	900.0	75	750.0	75	750.0	0.08"
EAD757545	75	750.0	75	750.0	45	450.0	65	650.0	80	800.0	65	650.0	65	650.0	0.08"
EAD756545	75	750.0	65	650.0	45	450.0	65	650.0	70	700.0	65	650.0	55	550.0	0.08"
EAD707040	70	700.0	70	700.0	40	400.0	60	600.0	75	750.0	60	600.0	60	600.0	0.08"
EAD706040	70	700.0	60	600.0	40	400.0	60	600.0	65	650.0	60	600.0	55	550.0	0.08"
EAD656535	65	650.0	65	650.0	35	350.0	55	550.0	70	700.0	55	550.0	55	550.0	0.08"
EAD655535	65	650.0	55	550.0	35	350.0	55	550.0	60	600.0	55	550.0	45	450.0	0.08"
EAD606030	60	600.0	60	600.0	30	300.0	50	500.0	65	650.0	50	500.0	50	500.0	0.08"