



SPECIFICATIONS

- NEMA 6P and IP68
- Submersible up to 15 ft / 5 mtr (IEC 60529)
- Corrosion Resistant Salt Spray Test (ASTM B117)
- Seams continuously welded and ground smooth
- Heavy Duty removable door Hinges
- Single piece Neoprene Gasket
- Dual Gasket Beryllium Copper
- 360° Shielding EMC / EMP (MIL-STD-285)
- Internal Threaded Collar Stud locations for Internal Mount Plate [B]
- High Impact & Crush Resistance (IK10)
- Designed to withstand Shock & Vibration (MIL-STD-810)

MATERIAL

Stainless Steel Type 316 14 gauge | 2.00mm*

CODE

S

FINISH

#4 Surface Finish*

M

*Alternative finish & material options available

ACCESSORIES

Internal Mount Plate	B
Hinged Lid / Door	H
Optical Window Lid / Door	O
Security Lock Tab	P
Nameplate	N
Captive Lid Fasteners	C
Internal Swing Out Panel	S
Shock & Vibration Mount Kit	V
External Grounding Stud	G
Lifting Eye Hooks	L
Raised Floor Mounting Plinths	R
Heavy Duty Gusset mount tabs	T
Lid / Door Stay	D
Access Door (IP66)	A
Pull Handle	U
Document Pocket	M
Welded In-Place Hubs	*
Welded In-Place Studs	*
Cable Glands / Cord grips	*
NPT Cable Glands	*
Integrated Thermal Heatsink	*
CARC Paint System	*

*Customer Modification Code is required when the Accessory component selected requires any of the following: enclosure cutouts, through holes or penetrations, customer involved design for accessory placement. This code is added in front of the part number by SLAYSON® to provide a unique identifier for customer specific engineering data.

PART NUMBER BUILDER

Customer Mod Code*	—	Material	Imperial	A Height (cm)	B Width (cm)	C Depth (cm)	Accessory Codes
	—	E S M		9 0	9 0	6 0	

Enclosure Series Finish For Non-Standard sizes or to add Optional Accessories use the Part Number Builder to configure the part number.

INDUSTRY STANDARDS



NEMA Type 6, 6P
IP67/68 IEC 60529
IK10 Impact Resistant
MIL- STD- 810, MIL-STD-285

APPLICATION

The NAV-CONTROL-6P offers ultimate protection for topside shipboard electronics, Naval systems and marine electronic hardware deployed in the harshest environments. Manufactured from corrosion resistant Stainless Steel Type 316 this Panel series has hermetic sealing preventing any ingress of dust and water, with dual Beryllium Copper gasket to insure complete 360° EMC/RFI immunity and operational control access using the Shielded Access Door (IP66) optional accessory. The NAV-CONTROL-6P offers a COTS range of corrosion resistant Shielded Control Panel and Accessories delivering a proven, flexible and rugged panel enclosure system to Naval specification.

MODIFICATION AND CUSTOMIZATION

SLAYSON® excels at modifying and customizing all our products to meet your exact specifications. Whether you require, connector through hole cutouts, welded in-place accessories, or a non- standard size. Contact our experienced Engineers about your project specific solution.

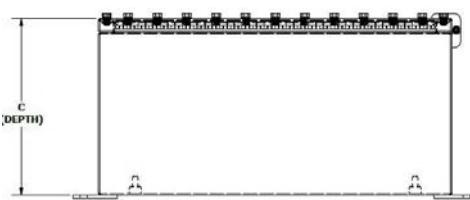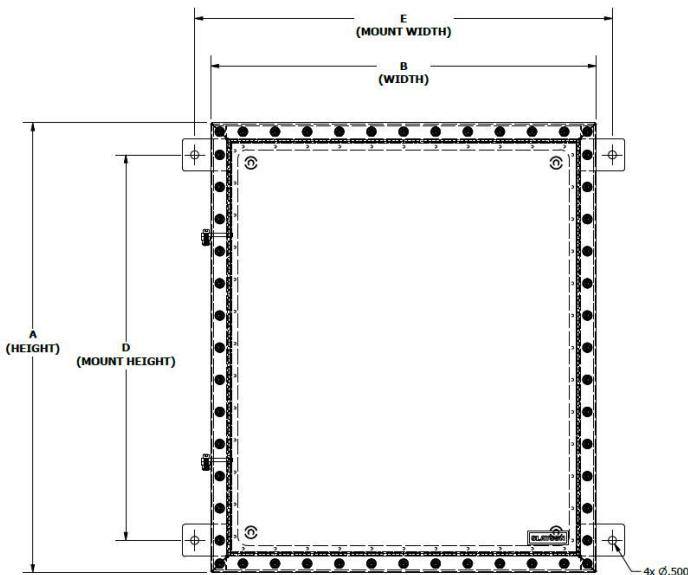

PART NUMBER	A		B		C		D		E		INTERNAL MOUNT PLATE				Gauge mm	
	Height		Width		Depth		Mount Height		Mount Width		Height		Width			
	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm		
ESM909060	90	900.0	90	900.0	60	600.0	80	800.0	95	950.0	80	800.0	80	800.0	2.00	
ESM909030	90	900.0	90	900.0	30	300.0	80	800.0	95	950.0	80	800.0	80	800.0	2.00	
ESM858560	85	850.0	85	850.0	60	600.0	75	750.0	90	900.0	75	750.0	75	750.0	2.00	
ESM858530	85	850.0	85	850.0	30	300.0	75	750.0	90	900.0	75	750.0	75	750.0	2.00	
ESM757545	75	750.0	75	750.0	45	450.0	65	650.0	80	800.0	65	650.0	65	650.0	2.00	
ESM756545	75	750.0	65	650.0	45	450.0	65	650.0	70	700.0	65	650.0	55	550.0	2.00	
ESM707040	70	700.0	70	700.0	40	400.0	60	600.0	75	750.0	60	600.0	60	600.0	2.00	
ESM706040	70	700.0	60	600.0	40	400.0	60	600.0	65	650.0	60	600.0	55	550.0	2.00	
ESM656535	65	650.0	65	650.0	35	350.0	55	550.0	70	700.0	55	550.0	55	550.0	2.00	
ESM655535	65	650.0	55	550.0	35	350.0	55	550.0	60	600.0	55	550.0	45	450.0	2.00	
ESM606030	60	600.0	60	600.0	30	300.0	50	500.0	65	650.0	50	500.0	50	500.0	2.00	