

INDUSTRY STANDARDS


NEMA Type 6, 6P
 IP67/68 IEC 60529
 IK10 Impact Resistant

APPLICATION

The SUBMERSIBLE PULL BOX redefines conduit systems, serving as pull and splice boxes while protecting conductors. Designed for inline installation, these NEMA 6P and IP68 rated Pull Boxes withstand partial or prolonged submersion up to 15ft/5m. Manufactured using marine grade 316 Stainless Steel, they resist corrosion, impact and ensure durability in harsh environments.

MODIFICATION AND CUSTOMIZATION

SLAYSON® excels at modifying and customizing all our products to meet your exact specifications. Whether you require, connector through hole cutouts, welded in-place accessories, or a non- standard size. Contact our experienced Engineers about your project specific solution.

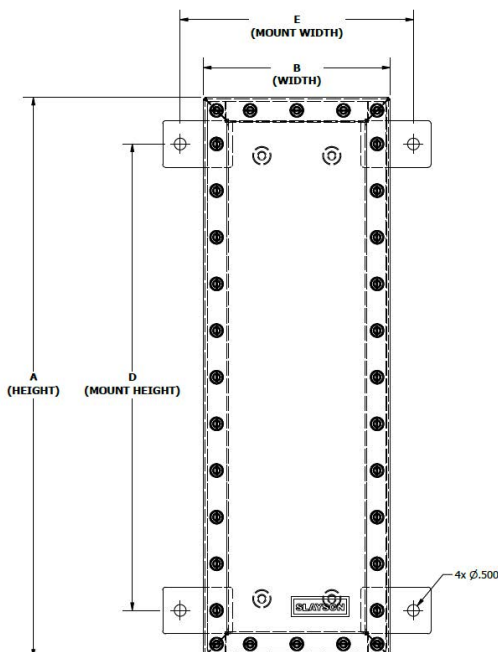

SPECIFICATIONS

- NEMA 6P and IP68
- Submersible up to 15 ft / 5 mtr (IEC 60529)
- Corrosion Resistant Salt Spray Test (ASTM B117)
- Stainless Steel Type 316 Fasteners & Hardware
- Trough Collar Sealing Flange
- Seams continuously welded and ground smooth
- Single piece Neoprene Gasket
- Internal Threaded Collar Stud locations for Internal Mount Plate [B]
- High Impact & Crush Resistance (IK10)

MATERIAL

Stainless Steel Type 316 14 gauge | 2.00mm*

CODE

S

FINISH

#4 Surface Finish*

M

*Alternative finish & material options available

ACCESSORIES

Internal Mount Plate	B
Hinged Lid / Door	H
Optical Window Lid / Door	O
Security Lock Tab	P
Nameplate	N
Captive Lid Fasteners	C
Shock & Vibration Mount Kit	V
360° EMC / EMP Shielding Gasket	E
External Grounding Stud	G
Lifting Eye Hooks	L
Raised Floor Mounting Plinths	R
Heavy Duty Gusset mount tabs	T
Pull Handle	U
Document Pocket	M
Welded In-Place Hubs	*
Welded In-Place Studs	*
Cable Glands / Cord grips	*
NPT Cable Glands	*


*Customer Modification Code is required when the Accessory component selected requires any of the following: enclosure cutouts, through holes or penetrations, customer involved design for accessory placement. This code is added in front of the part number by SLAYSON® to provide a unique identifier for customer specific engineering data.

PART NUMBER BUILDER

Customer Mod Code* - L S M - A Height (in) 1 2 0 4 - B Width (in) 0 4 - C Depth (in) 0 4 - Accessory Codes

Enclosure Series Finish

For Non-Standard sizes or to add Optional Accessories use the Part Number Builder to configure the part number.

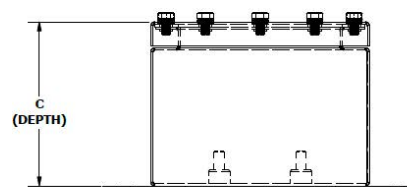

PART NUMBER	A		B		C		D		E		INTERNAL MOUNT PLATE				Gauge
	Height		Width		Depth		Mount Height		Mount Width		Height		Width		
	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	
LSM301010	30	300.0	10	100.0	10	100.0	25	250.0	15	150.0	30	300.0	10	100.0	2.00
LSM301015	30	300.0	10	100.0	15	150.0	25	250.0	15	150.0	30	300.0	10	100.0	2.00
LSM301020	30	300.0	10	100.0	20	200.0	25	250.0	15	150.0	30	300.0	10	100.0	2.00
LSM301025	30	300.0	10	100.0	25	250.0	25	250.0	15	150.0	30	300.0	10	100.0	2.00
LSM301510	30	300.0	15	150.0	10	100.0	25	250.0	20	200.0	30	300.0	15	150.0	2.00
LSM301515	30	300.0	15	150.0	15	150.0	25	250.0	20	200.0	30	300.0	15	150.0	2.00
LSM301520	30	300.0	15	150.0	20	200.0	25	250.0	20	200.0	30	300.0	15	150.0	2.00
LSM301525	30	300.0	15	150.0	25	250.0	25	250.0	20	200.0	30	300.0	15	150.0	2.00
LSM302010	30	300.0	20	200.0	10	100.0	25	250.0	25	250.0	30	300.0	20	200.0	2.00
LSM302015	30	300.0	20	200.0	15	150.0	25	250.0	25	250.0	30	300.0	20	200.0	2.00
LSM302020	30	300.0	20	200.0	20	200.0	25	250.0	25	250.0	30	300.0	20	200.0	2.00
LSM302025	30	300.0	20	200.0	25	250.0	25	250.0	25	250.0	30	300.0	20	200.0	2.00
LSM302510	30	300.0	25	250.0	10	100.0	25	250.0	30	300.0	30	300.0	25	250.0	2.00
LSM302515	30	300.0	25	250.0	15	150.0	25	250.0	30	300.0	30	300.0	25	250.0	2.00
LSM302520	30	300.0	25	250.0	20	200.0	25	250.0	30	300.0	30	300.0	25	250.0	2.00
LSM302525	30	300.0	25	250.0	25	250.0	40	400.0	30	300.0	30	300.0	25	250.0	2.00
LSM451010	45	450.0	10	100.0	10	100.0	40	400.0	15	150.0	45	450.0	10	100.0	2.00
LSM451015	45	450.0	10	100.0	15	150.0	40	400.0	15	150.0	45	450.0	10	100.0	2.00
LSM451020	45	450.0	10	100.0	20	200.0	40	400.0	15	150.0	45	450.0	10	100.0	2.00
LSM451025	45	450.0	10	100.0	25	250.0	40	400.0	15	150.0	45	450.0	10	100.0	2.00
LSM451510	45	450.0	15	150.0	10	100.0	40	400.0	20	200.0	45	450.0	15	150.0	2.00
LSM451515	45	450.0	15	150.0	15	150.0	40	400.0	20	200.0	45	450.0	15	150.0	2.00
LSM451520	45	450.0	15	150.0	20	200.0	40	400.0	20	200.0	45	450.0	15	150.0	2.00
LSM451525	45	450.0	15	150.0	25	250.0	40	400.0	20	200.0	45	450.0	15	150.0	2.00
LSM452010	45	450.0	20	200.0	10	100.0	40	400.0	25	250.0	45	450.0	20	200.0	2.00
LSM452015	45	450.0	20	200.0	15	150.0	40	400.0	25	250.0	45	450.0	20	200.0	2.00
LSM452020	45	450.0	20	200.0	20	200.0	40	400.0	25	250.0	45	450.0	20	200.0	2.00
LSM452025	45	450.0	20	200.0	25	250.0	40	400.0	25	250.0	45	450.0	20	200.0	2.00
LSM452510	45	450.0	25	250.0	10	100.0	40	400.0	30	300.0	45	450.0	25	250.0	2.00
LSM452515	45	450.0	25	250.0	15	150.0	40	400.0	30	300.0	45	450.0	25	250.0	2.00
LSM452520	45	450.0	25	250.0	20	200.0	40	400.0	30	300.0	45	450.0	25	250.0	2.00
LSM452525	45	450.0	25	250.0	25	250.0	40	400.0	30	300.0	45	450.0	25	250.0	2.00
LSM601010	60	600.0	10	100.0	10	100.0	55	550.0	15	150.0	60	600.0	10	100.0	2.00
LSM601015	60	600.0	10	100.0	15	150.0	55	550.0	15	150.0	60	600.0	10	100.0	2.00
LSM601020	60	600.0	10	100.0	20	200.0	55	550.0	15	150.0	60	600.0	10	100.0	2.00
LSM601025	60	600.0	10	100.0	25	250.0	55	550.0	15	150.0	60	600.0	10	100.0	2.00
LSM601510	60	600.0	15	150.0	10	100.0	55	550.0	20	200.0	60	600.0	15	150.0	2.00
LSM601515	60	600.0	15	150.0	15	150.0	55	550.0	20	200.0	60	600.0	15	150.0	2.00
LSM601520	60	600.0	15	150.0	20	200.0	55	550.0	20	200.0	60	600.0	15	150.0	2.00
LSM601525	60	600.0	15	150.0	25	250.0	55	550.0	20	200.0	60	600.0	15	150.0	2.00
LSM602010	60	600.0	20	200.0	10	100.0	55	550.0	25	250.0	60	600.0	20	200.0	2.00
LSM602015	60	600.0	20	200.0	15	150.0	55	550.0	25	250.0	60	600.0	20	200.0	2.00
LSM602020	60	600.0	20	200.0	20	200.0	55	550.0	25	250.0	60	600.0	20	200.0	2.00
LSM602025	60	600.0	20	200.0	25	250.0	55	550.0	25	250.0	60	600.0	20	200.0	2.00
LSM602510	60	600.0	25	250.0	10	100.0	55	550.0	30	300.0	60	600.0	25	250.0	2.00
LSM602515	60	600.0	25	250.0	15	150.0	55	550.0	30	300.0	60	600.0	25	250.0	2.00
LSM602520	60	600.0	25	250.0	20	200.0	55	550.0	30	300.0	60	600.0	25	250.0	2.00
LSM602525	60	600.0	25	250.0	25	250.0	55	550.0	30	300.0	60	600.0	25	250.0	2.00