


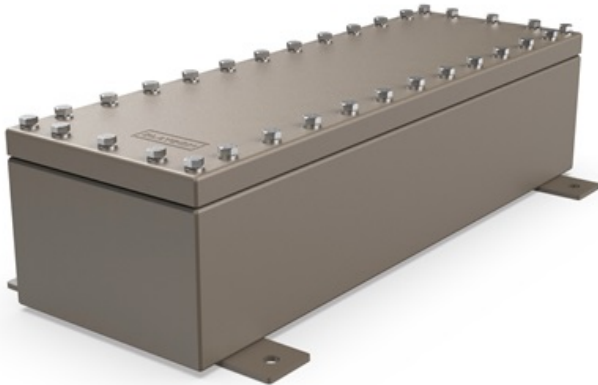

INDUSTRY STANDARDS


NEMA Type 6, 6P
IP67/68 IEC 60529
IK10 Impact Resistant

APPLICATION

The SUBMERSIBLE PULL BOX redefines conduit systems, serving as pull and splice boxes while protecting conductors. Designed for inline installation, these NEMA 6P and IP68 rated Pull Boxes withstand partial or prolonged submersion up to 15ft/5m. Manufactured using Aluminum and finished using a Marine Grade Powdercoat, they resist corrosion, impact and ensure durability in harsh environments.

MODIFICATION AND CUSTOMIZATION

SLAYSON® excels at modifying and customizing all our products to meet your exact specifications. Whether you require, connector through hole cutouts, welded in-place accessories, or a non-standard size. Contact our experienced Engineers about your project specific solution.

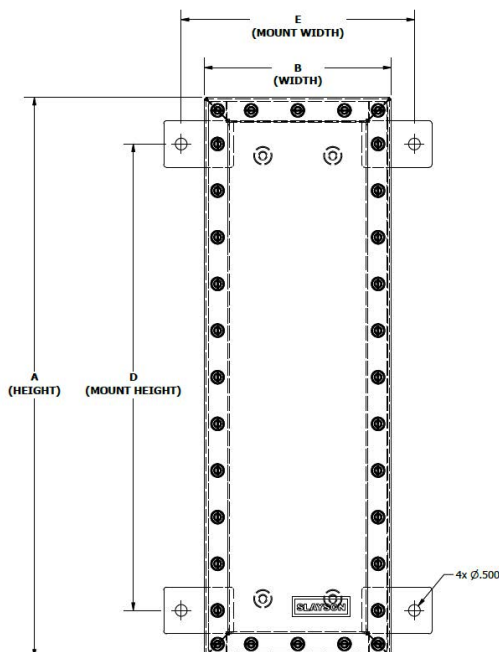

SPECIFICATIONS

- NEMA 6P and IP68
- Submersible up to 15 ft / 5 mtr (IEC 60529)
- Corrosion Resistant Salt Spray Test (ASTM B117)
- Stainless Steel Type 316 Fasteners & Hardware
- Trough Collar Sealing Flange
- Seams continuously welded and ground smooth
- Single piece Neoprene Gasket
- Internal Threaded Collar Stud locations for Internal Mount Plate [B]
- High Impact & Crush Resistance (IK10)

MATERIAL

Aluminum 0.080" | 2.00mm*

CODE

A

FINISH

Marine Grade Powdercoat - Gray ANSI 61, RAL 7001*

G

Exterior Paint Finish over Chromate Conversion Coating pre-treatment all surfaces

*Alternative finish & material options available on request

ACCESSORIES


Internal Mount Plate	B
Hinged Lid / Door	H
Optical Window Lid / Door	O
Security Lock Tab	P
Nameplate	N
Captive Lid Fasteners	C
Shock & Vibration Mount Kit	V
360° EMC / EMP Shielding Gasket	E
External Grounding Stud	G
Lifting Eye Hooks	L
Raised Floor Mounting Plinths	R
Heavy Duty Gusset mount tabs	T
Pull Handle	U
Document Pocket	M
Welded In-Place Hubs	*
Welded In-Place Studs	*
Cable Glands / Cord grips	*
NPT Cable Glands	*

*Customer Modification Code is required when the Accessory component selected requires any of the following: enclosure cutouts, through holes or penetrations, customer involved design for accessory placement. This code is added in front of the part number by SLAYSON® to provide a unique identifier for customer specific engineering data.

PART NUMBER BUILDER

Customer Mod Code*	Material	Imperial	A Height (in)	B Width (in)	C Depth (in)	Accessory Codes
	L	A	3	0	1	0
	Enclosure Series	Finish				

For Non-Standard sizes or to add Optional Accessories use the Part Number Builder to configure the part number.

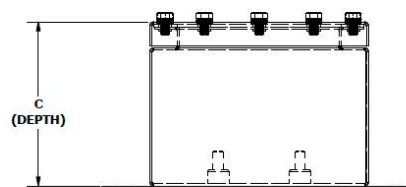

	A		B		C		D		E		INTERNAL MOUNT PLATE				
PART NUMBER	Height		Width		Depth		Mount Height		Mount Width		Height		Width		Gauge
	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	
LAG301010	30	300.0	10	100.0	10	100.0	25	250.0	15	150.0	30	300.0	10	100.0	2.00
LAG301015	30	300.0	10	100.0	15	150.0	25	250.0	15	150.0	30	300.0	10	100.0	2.00
LAG301020	30	300.0	10	100.0	20	200.0	25	250.0	15	150.0	30	300.0	10	100.0	2.00
LAG301025	30	300.0	10	100.0	25	250.0	25	250.0	15	150.0	30	300.0	10	100.0	2.00
LAG301510	30	300.0	15	150.0	10	100.0	25	250.0	20	200.0	30	300.0	15	150.0	2.00
LAG301515	30	300.0	15	150.0	15	150.0	25	250.0	20	200.0	30	300.0	15	150.0	2.00
LAG301520	30	300.0	15	150.0	20	200.0	25	250.0	20	200.0	30	300.0	15	150.0	2.00
LAG301525	30	300.0	15	150.0	25	250.0	25	250.0	20	200.0	30	300.0	15	150.0	2.00
LAG302010	30	300.0	20	200.0	10	100.0	25	250.0	25	250.0	30	300.0	20	200.0	2.00
LAG302015	30	300.0	20	200.0	15	150.0	25	250.0	25	250.0	30	300.0	20	200.0	2.00
LAG302020	30	300.0	20	200.0	20	200.0	25	250.0	25	250.0	30	300.0	20	200.0	2.00
LAG302025	30	300.0	20	200.0	25	250.0	25	250.0	25	250.0	30	300.0	20	200.0	2.00
LAG302510	30	300.0	25	250.0	10	100.0	25	250.0	30	300.0	30	300.0	25	250.0	2.00
LAG302515	30	300.0	25	250.0	15	150.0	25	250.0	30	300.0	30	300.0	25	250.0	2.00
LAG302520	30	300.0	25	250.0	20	200.0	25	250.0	30	300.0	30	300.0	25	250.0	2.00
LAG302525	30	300.0	25	250.0	25	250.0	40	400.0	30	300.0	30	300.0	25	250.0	2.00
LAG451010	45	450.0	10	100.0	10	100.0	40	400.0	15	150.0	45	450.0	10	100.0	2.00
LAG451015	45	450.0	10	100.0	15	150.0	40	400.0	15	150.0	45	450.0	10	100.0	2.00
LAG451020	45	450.0	10	100.0	20	200.0	40	400.0	15	150.0	45	450.0	10	100.0	2.00
LAG451025	45	450.0	10	100.0	25	250.0	40	400.0	15	150.0	45	450.0	10	100.0	2.00
LAG451510	45	450.0	15	150.0	10	100.0	40	400.0	20	200.0	45	450.0	15	150.0	2.00
LAG451515	45	450.0	15	150.0	15	150.0	40	400.0	20	200.0	45	450.0	15	150.0	2.00
LAG451520	45	450.0	15	150.0	20	200.0	40	400.0	20	200.0	45	450.0	15	150.0	2.00
LAG451525	45	450.0	15	150.0	25	250.0	40	400.0	20	200.0	45	450.0	15	150.0	2.00
LAG452010	45	450.0	20	200.0	10	100.0	40	400.0	25	250.0	45	450.0	20	200.0	2.00
LAG52015	45	450.0	20	200.0	15	150.0	40	400.0	25	250.0	45	450.0	20	200.0	2.00
LAG452020	45	450.0	20	200.0	20	200.0	40	400.0	25	250.0	45	450.0	20	200.0	2.00
LAG452025	45	450.0	20	200.0	25	250.0	40	400.0	25	250.0	45	450.0	20	200.0	2.00
LAG452510	45	450.0	25	250.0	10	100.0	40	400.0	30	300.0	45	450.0	25	250.0	2.00
LAG452515	45	450.0	25	250.0	15	150.0	40	400.0	30	300.0	45	450.0	25	250.0	2.00
LAG452520	45	450.0	25	250.0	20	200.0	40	400.0	30	300.0	45	450.0	25	250.0	2.00
LAG452525	45	450.0	25	250.0	25	250.0	40	400.0	30	300.0	45	450.0	25	250.0	2.00
LAG601010	60	600.0	10	100.0	10	100.0	55	550.0	15	150.0	60	600.0	10	100.0	2.00
LAG601015	60	600.0	10	100.0	15	150.0	55	550.0	15	150.0	60	600.0	10	100.0	2.00
LAG601020	60	600.0	10	100.0	20	200.0	55	550.0	15	150.0	60	600.0	10	100.0	2.00
LAG601025	60	600.0	10	100.0	25	250.0	55	550.0	15	150.0	60	600.0	10	100.0	2.00
LAG601510	60	600.0	15	150.0	10	100.0	55	550.0	20	200.0	60	600.0	15	150.0	2.00
LAG601515	60	600.0	15	150.0	15	150.0	55	550.0	20	200.0	60	600.0	15	150.0	2.00
LAG601520	60	600.0	15	150.0	20	200.0	55	550.0	20	200.0	60	600.0	15	150.0	2.00
LAG601525	60	600.0	15	150.0	25	250.0	55	550.0	20	200.0	60	600.0	15	150.0	2.00
LAG602010	60	600.0	20	200.0	10	100.0	55	550.0	25	250.0	60	600.0	20	200.0	2.00
LAG602015	60	600.0	20	200.0	15	150.0	55	550.0	25	250.0	60	600.0	20	200.0	2.00
LAG602020	60	600.0	20	200.0	20	200.0	55	550.0	25	250.0	60	600.0	20	200.0	2.00
LAG602025	60	600.0	20	200.0	25	250.0	55	550.0	25	250.0	60	600.0	20	200.0	2.00
LAG602510	60	600.0	25	250.0	10	100.0	55	550.0	30	300.0	60	600.0	25	250.0	2.00
LAG602515	60	600.0	25	250.0	15	150.0	55	550.0	30	300.0	60	600.0	25	250.0	2.00
LAG602520	60	600.0	25	250.0	20	200.0	55	550.0	30	300.0	60	600.0	25	250.0	2.00
LAG602525	60	600.0	25	250.0	25	250.0	55	550.0	30	300.0	60	600.0	25	250.0	2.00