
SLAYSON® SUBMERSIBLE PULL BOX

HydroLine™

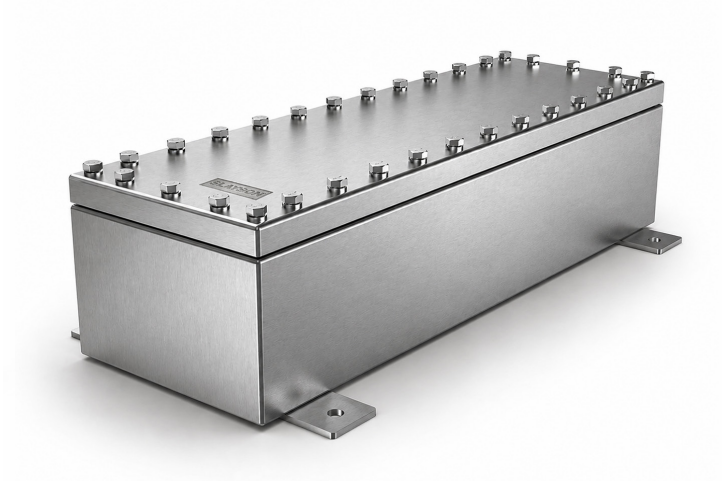

INDUSTRY STANDARDS

UL 508A Listed, Type 4X, 6, 6P, File No. E548541 CUL
Listed per CSA C22.2 No. 14, Type 4, 12 File No. E548541


NEMA Type 6P, IP67/68 IEC 60529
IK10 Impact Resistant

APPLICATION

The HydroLine™ SUBMERSIBLE PULL BOX redefines conduit systems, serving as pull and splice boxes while protecting conductors. Designed for inline installation, these NEMA 6P and IP68 rated Pull Boxes withstand partial or prolonged submersion up to 15ft/5m. Manufactured using marine grade 316 Stainless Steel, they resist corrosion and impact, and ensure durability in harsh environments.

MODIFICATION & CUSTOMIZATION

SLAYSON® excels at modifying and customizing all our products to meet your exact specifications. Whether you require custom engraving and decals, connector through-hole cutouts, welded in-place accessories, or a non-standard size, contact our experienced engineers to discuss your project-specific solution.

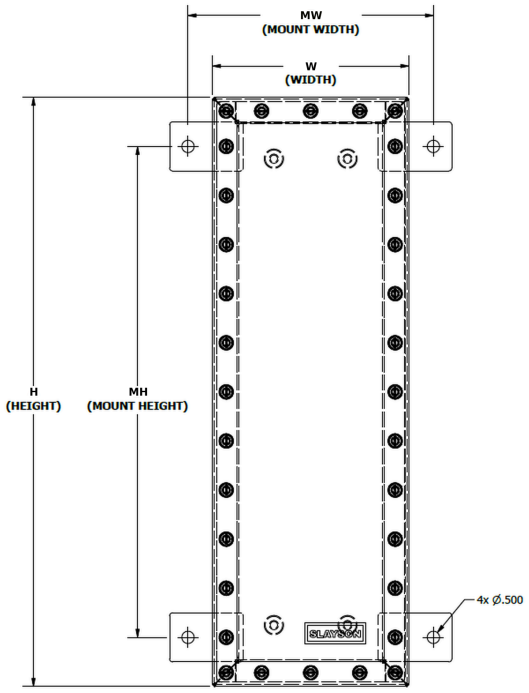

SPECIFICATIONS

- NEMA 6P / IP68 / IK10
- UL / CSA Tested to 6 ft / 2 mtr (UL508A)
- Submersible up to 15 ft / 5 mtr (IEC 60529)
- Corrosion Resistant Salt Spray Test (ASTM B117)
- Manufactured from 14 gauge Stainless Steel Type 316
- Trough Collar Sealing Flange
- Seams continuously welded & ground smooth
- Single-piece Neoprene Gasket
- Internal Threaded Collar Stud locations for Internal Mount Plate [B]
- High Impact & Crush Resistance (IK10)

MATERIAL	CODE
Stainless Steel Type 316, 14 gauge | 2.00mm*	S

FINISH

#4 Surface Finish*	M

*Alternative finish & material options available

ACCESSORIES

Internal Mount Plate	B
Hinged Lid / Door	H
Optical Window Lid / Door	O
Security Lock Tab	P
Nameplate	N
Captive Lid Fasteners	C
Internal Swing Out Panel	S
Shock & Vibration Mount Kit	V
360° EMC / EMP Shielding Gasket	E
External Grounding Stud	G
Lifting Eye Hooks	L
Raised Floor Mounting Plinths	R
Heavy Duty Gusset Mount Tabs	T
Lid / Door Stay	D
Access Door (IP66)	A
Pull Handle	U
Document Pocket	M
Welded In-Place Hubs	*
Welded In-Place Studs	*
Cable Glands / Cord Grips	*
NPT Cable Glands	*


*Customer Modification Code is required when the Accessory component selected requires any of the following: enclosure cutouts, through holes or penetrations, customer-involved design for accessory placement. This code is added in front of the part number by SLAYSON® to provide a unique identifier for customer specific engineering data.

PART NUMBER BUILDER

Customer Mod Code*			Material		Imperial	H Height (in)		W Width (in)		D Depth (in)		Accessory Codes		
		–	L	S	M	I	1	2	0	4	0	4		
			Enclosure Series		Finish									

For Non-Standard sizes or to add Optional Accessories use the Part Number Builder to configure the part number.

*Generated by SLAYSON Engineering for customer specific modifications

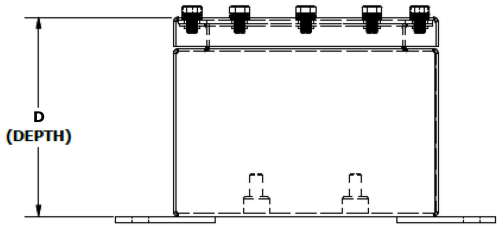

SUBMERSIBLE PULL BOX

PART NUMBER	H		W		D		MH		MW		INTERNAL MOUNT PLATE				Gauge
	Height		Width		Depth		Mount Height		Mount Width		Height		Width		
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	
LSMI120404	12	304.8	04	101.6	04	101.6	10	254.0	06	152.4	11	279.4	03	76.2	14
LSMI120406	12	304.8	04	101.6	06	152.4	10	254.0	06	152.4	11	279.4	03	76.2	14
LSMI120408	12	304.8	04	101.6	08	203.2	10	254.0	06	152.4	11	279.4	03	76.2	14
LSMI120410	12	304.8	04	101.6	10	254.0	10	254.0	06	152.4	11	279.4	03	76.2	14
LSMI120604	12	304.8	06	152.4	04	101.6	10	254.0	08	203.2	11	279.4	05	127.0	14
LSMI120606	12	304.8	06	152.4	06	152.4	10	254.0	08	203.2	11	279.4	05	127.0	14
LSMI120608	12	304.8	06	152.4	08	203.2	10	254.0	08	203.2	11	279.4	05	127.0	14
LSMI120610	12	304.8	06	152.4	10	254.0	10	254.0	08	203.2	11	279.4	05	127.0	14
LSMI120804	12	304.8	08	203.2	04	101.6	10	254.0	10	254.0	11	279.4	07	177.8	14
LSMI120806	12	304.8	08	203.2	06	152.4	10	254.0	10	254.0	11	279.4	07	177.8	14
LSMI120808	12	304.8	08	203.2	08	203.2	10	254.0	10	254.0	11	279.4	07	177.8	14
LSMI120810	12	304.8	08	203.2	10	254.0	10	254.0	10	254.0	11	279.4	07	177.8	14
LSMI121004	12	304.8	10	254.0	04	101.6	10	254.0	12	304.8	11	279.4	09	228.6	14
LSMI121006	12	304.8	10	254.0	06	152.4	10	254.0	12	304.8	11	279.4	09	228.6	14
LSMI121008	12	304.8	10	254.0	08	203.2	10	254.0	12	304.8	11	279.4	09	228.6	14
LSMI121010	12	304.8	10	254.0	10	254.0	10	254.0	12	304.8	11	279.4	09	228.6	14
LSMI180404	18	457.2	04	101.6	04	101.6	16	406.4	06	152.4	17	431.8	03	76.2	14
LSMI180406	18	457.2	04	101.6	06	152.4	16	406.4	06	152.4	17	431.8	03	76.2	14
LSMI180408	18	457.2	04	101.6	08	203.2	16	406.4	06	152.4	17	431.8	03	76.2	14
LSMI180410	18	457.2	04	101.6	10	254.0	16	406.4	06	152.4	17	431.8	03	76.2	14
LSMI180604	18	457.2	06	152.4	04	101.6	16	406.4	08	203.2	17	431.8	05	127.0	14
LSMI180606	18	457.2	06	152.4	06	152.4	16	406.4	08	203.2	17	431.8	05	127.0	14
LSMI180608	18	457.2	06	152.4	08	203.2	16	406.4	08	203.2	17	431.8	05	127.0	14
LSMI180610	18	457.2	06	152.4	10	254.0	16	406.4	08	203.2	17	431.8	05	127.0	14
LSMI180804	18	457.2	08	203.2	04	101.6	16	406.4	10	254.0	17	431.8	07	177.8	14
LSMI180806	18	457.2	08	203.2	06	152.4	16	406.4	10	254.0	17	431.8	07	177.8	14
LSMI180808	18	457.2	08	203.2	08	203.2	16	406.4	10	254.0	17	431.8	07	177.8	14
LSMI180810	18	457.2	08	203.2	10	254.0	16	406.4	10	254.0	17	431.8	07	177.8	14
LSMI181004	18	457.2	10	254.0	04	101.6	16	406.4	12	304.8	17	431.8	09	228.6	14
LSMI181006	18	457.2	10	254.0	06	152.4	16	406.4	12	304.8	17	431.8	09	228.6	14
LSMI181008	18	457.2	10	254.0	08	203.2	16	406.4	12	304.8	17	431.8	09	228.6	14
LSMI181010	18	457.2	10	254.0	10	254.0	16	406.4	12	304.8	17	431.8	09	228.6	14
LSMI240404	24	609.6	04	101.6	04	101.6	22	558.8	06	152.4	23	584.2	03	76.2	14
LSMI240406	24	609.6	04	101.6	06	152.4	22	558.8	06	152.4	23	584.2	03	76.2	14
LSMI240408	24	609.6	04	101.6	08	203.2	22	558.8	06	152.4	23	584.2	03	76.2	14
LSMI240410	24	609.6	04	101.6	10	254.0	22	558.8	06	152.4	23	584.2	03	76.2	14
LSMI240604	24	609.6	06	152.4	04	101.6	22	558.8	08	203.2	23	584.2	05	127.0	14
LSMI240606	24	609.6	06	152.4	06	152.4	22	558.8	08	203.2	23	584.2	05	127.0	14
LSMI240608	24	609.6	06	152.4	08	203.2	22	558.8	08	203.2	23	584.2	05	127.0	14
LSMI240610	24	609.6	06	152.4	10	254.0	22	558.8	08	203.2	23	584.2	05	127.0	14
LSMI240804	24	609.6	08	203.2	04	101.6	22	558.8	10	254.0	23	584.2	07	177.8	14
LSMI240806	24	609.6	08	203.2	06	152.4	22	558.8	10	254.0	23	584.2	07	177.8	14
LSMI240808	24	609.6	08	203.2	08	203.2	22	558.8	10	254.0	23	584.2	07	177.8	14
LSMI240810	24	609.6	08	203.2	10	254.0	22	558.8	10	254.0	23	584.2	07	177.8	14
LSMI241004	24	609.6	10	254.0	04	101.6	22	558.8	12	304.8	23	584.2	09	228.6	14
LSMI241006	24	609.6	10	254.0	06	152.4	22	558.8	12	304.8	23	584.2	09	228.6	14
LSMI241008	24	609.6	10	254.0	08	203.2	22	558.8	12	304.8	23	584.2	09	228.6	14
LSMI241010	24	609.6	10	254.0	10	254.0	22	558.8	12	304.8	23	584.2	09	228.6	14