NAV-XP-6P MARINE INTERLOCK BOX

ExoShield™




NEMA Type 6P, IP68 IEC 60529
IK10 Impact Resistant
MIL- STD- 810, MIL-STD-285

APPLICATION

The ExoShield™ NAV-XP-6P MARINE INTERLOCK BOX offers reliable protection for shipboard systems, Naval vessels and marine electronic hardware deployed in the harshest environments. Manufactured from Type 316 Stainless Steel this Enclosure series has hermetic sealing preventing any ingress of dust and water, with Dual Copper gasket to insure complete 360° EMC/RFI immunity. The ExoShield™ offers a COTS range of corrosion resistant enclosures and accessories, delivering a proven and flexible enclosure system to Naval specification.

MODIFICATION & CUSTOMIZATION

SLAYSON® excels at modifying and customizing all our products to meet your exact specifications. Whether you require custom engraving and decals, connector through-hole cutouts, welded in-place accessories, or a non-standard size, contact our experienced engineers to discuss your project-specific solution.

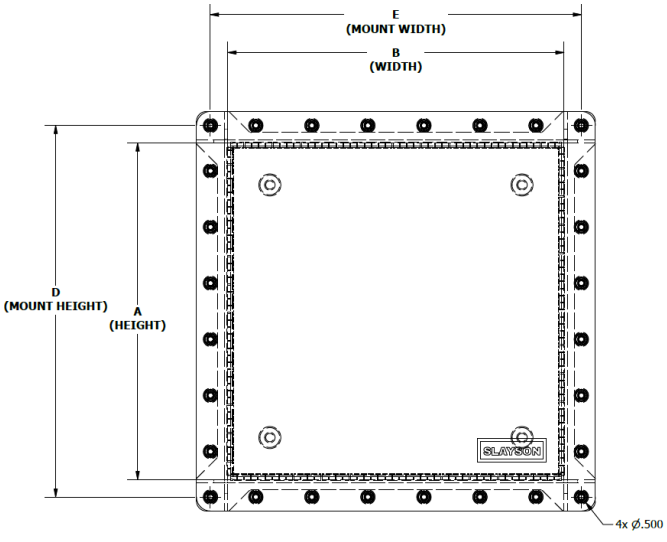

SPECIFICATIONS

- NEMA 6P / IP68 / IK10
- Submersible up to 15 ft / 5 mtr (IEC 60529)
- Corrosion Resistant Salt Spray Test (ASTM B117)
- Rugged Design & Construction
- Seams continuously welded and ground smooth
- Single piece Neoprene Gasket
- Dual Gasket Copper
- 360° Shielding EMC / RFI (MIL-STD-285)
- Interlock Corner Mounting locations
- Internal Threaded Collar Stud locations for Internal Mount Plate [B]
- High Impact & Crush Resistance (IK10)
- Designed to withstand Shock & Vibration (MIL-STD-810)

MATERIAL	CODE
Stainless Steel Type 316, 12 gauge | 3.00mm*	S

FINISH	
Non Reflective Bead Blast*	R

*Alternative finish & material options available

ACCESSORIES


Internal Mount Plate	B
Hinged Lid / Door	H
Optical Window Lid / Door	O
Security Lock Tab	P
Nameplate	N
Captive Lid Fasteners	C
Internal Swing Out Panel	S
Shock & Vibration Mount Kit	V
External Grounding Stud	G
Lifting Eye Hooks	L
Heavy Duty Gusset Mount Tabs	T
Access Door (IP66)	A
Pull Handle	U
Document Pocket	M
Welded In-Place Hubs	*
Welded In-Place Studs	*
Cable Glands / Cord Grips	*
NPT Cable Glands	*
Integrated Thermal Heatsink	*
CARC Paint System	*

*Customer Modification Code is required when the Accessory component selected requires any of the following: enclosure cutouts, through holes or penetrations, customer involved design for accessory placement. This code is added in front of the part number by SLAYSON® to provide a unique identifier for customer specific engineering data.

PART NUMBER BUILDER

Customer Mod Code*			Material		Imperial	A Height (cm)		B Width (cm)		C Depth (cm)		Accessory Codes		
		–	P	S	R	6	0	6	0	4	0			
			Enclosure Seres		Submersion Depth	For Non-Standard sizes or to add Optional Accessories use the Part Number Builder to configure the part number.								

*Generated by SLAYSON Engineering for customer specific modifications

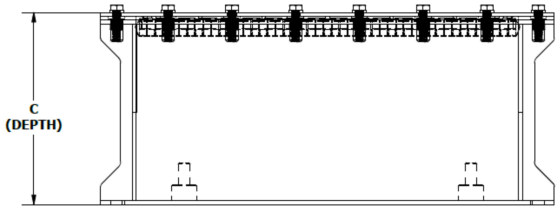

NAV-XP-6P MARINE INTERLOCK BOX

PART NUMBER	A		B		C		D		E		INTERNAL MOUNT PLATE				Gauge mm
	Height		Width		Depth		Mount Height		Mount Width		Height		Width		
	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	cm	mm	
PSR606040	60	600.0	60	600.0	40	400.0	63	630.0	63	630.0	55	550.0	55	550.0	3.00
PSR606030	60	600.0	60	600.0	30	300.0	63	630.0	63	630.0	55	550.0	55	550.0	3.00
PSR605535	60	600.0	55	550.0	35	350.0	63	630.0	58	580.0	55	550.0	50	500.0	3.00
PSR605030	60	600.0	50	500.0	30	300.0	63	630.0	53	530.0	55	550.0	45	450.0	3.00
PSR604525	60	600.0	45	450.0	25	250.0	63	630.0	48	480.0	55	550.0	40	400.0	3.00
PSR555540	55	550.0	55	550.0	40	400.0	58	580.0	58	580.0	50	500.0	50	500.0	3.00
PSR555530	55	550.0	55	550.0	30	300.0	58	580.0	58	580.0	50	500.0	50	500.0	3.00
PSR555035	55	550.0	50	500.0	35	350.0	58	580.0	53	530.0	50	500.0	45	450.0	3.00
PSR554530	55	550.0	45	450.0	30	300.0	58	580.0	48	480.0	50	500.0	40	400.0	3.00
PSR554025	55	550.0	40	400.0	25	250.0	58	580.0	43	430.0	50	500.0	35	350.0	3.00
PSR505035	50	500.0	50	500.0	35	350.0	53	530.0	53	530.0	45	450.0	45	450.0	3.00
PSR505025	50	500.0	50	500.0	25	250.0	53	530.0	53	530.0	45	450.0	45	450.0	3.00
PSR504530	50	500.0	45	450.0	30	300.0	53	530.0	48	480.0	45	450.0	40	400.0	3.00
PSR504025	50	500.0	40	400.0	25	250.0	53	530.0	43	430.0	45	450.0	35	350.0	3.00
PSR503520	50	500.0	35	350.0	20	200.0	53	530.0	38	380.0	45	450.0	30	300.0	3.00
PSR454535	45	450.0	45	450.0	35	350.0	48	480.0	48	480.0	40	400.0	40	400.0	3.00
PSR454525	45	450.0	45	450.0	25	250.0	48	480.0	48	480.0	40	400.0	40	400.0	3.00
PSR454030	45	450.0	40	400.0	30	300.0	48	480.0	43	430.0	40	400.0	35	350.0	3.00
PSR453525	45	450.0	35	350.0	25	250.0	48	480.0	38	380.0	40	400.0	30	300.0	3.00
PSR453020	45	450.0	30	300.0	20	200.0	48	480.0	33	330.0	40	400.0	25	250.0	3.00
PSR404030	40	400.0	40	400.0	30	300.0	43	430.0	43	430.0	35	350.0	35	350.0	3.00
PSR404025	40	400.0	40	400.0	25	250.0	43	430.0	43	430.0	35	350.0	35	350.0	3.00
PSR403525	40	400.0	35	350.0	25	250.0	43	430.0	38	380.0	35	350.0	30	300.0	3.00
PSR403020	40	400.0	30	300.0	20	200.0	43	430.0	33	330.0	35	350.0	25	250.0	3.00
PSR402515	40	400.0	25	250.0	15	150.0	43	430.0	28	280.0	35	350.0	20	200.0	3.00
PSR353525	35	350.0	35	350.0	25	250.0	38	380.0	38	380.0	30	300.0	30	300.0	3.00
PSR353520	35	350.0	35	350.0	20	200.0	38	380.0	38	380.0	30	300.0	30	300.0	3.00
PSR353020	35	350.0	30	300.0	20	200.0	38	380.0	33	330.0	30	300.0	25	250.0	3.00
PSR352515	35	350.0	25	250.0	15	150.0	38	380.0	28	280.0	30	300.0	20	200.0	3.00
PSR352010	35	350.0	20	200.0	10	100.0	38	380.0	23	230.0	30	300.0	15	150.0	3.00
PSR303025	30	300.0	30	300.0	25	250.0	33	330.0	33	330.0	25	250.0	25	250.0	3.00
PSR303020	30	300.0	30	300.0	20	200.0	33	330.0	33	330.0	25	250.0	25	250.0	3.00
PSR302520	30	300.0	25	250.0	20	200.0	33	330.0	28	280.0	25	250.0	20	200.0	3.00
PSR302015	30	300.0	20	200.0	15	150.0	33	330.0	23	230.0	25	250.0	15	150.0	3.00
PSR301510	30	300.0	15	150.0	10	100.0	33	330.0	18	180.0	25	250.0	10	100.0	3.00
PSR252520	25	250.0	25	250.0	20	200.0	28	280.0	28	280.0	20	200.0	20	200.0	3.00
PSR252515	25	250.0	25	250.0	15	150.0	28	280.0	28	280.0	20	200.0	20	200.0	3.00
PSR252015	25	250.0	20	200.0	15	150.0	28	280.0	23	230.0	20	200.0	15	150.0	3.00
PSR251510	25	250.0	15	150.0	10	100.0	28	280.0	18	180.0	20	200.0	10	100.0	3.00
PSR202015	20	200.0	20	200.0	15	150.0	23	230.0	23	230.0	15	150.0	15	150.0	3.00
PSR201510	20	200.0	15	150.0	10	100.0	23	230.0	18	180.0	15	150.0	10	100.0	3.00